NOVAMICROSPIRIT 45° 6,5×6,5 MAG *Recessed linear*



Fully customisable linear LED luminaire, recessed in showcases, displays and furniture. Available in made-to-measure lengths. Continuous line light beam. Aluminium body, PMMA lens, direct light. Dimmable. Available with magnets for quick fixing on iron surfaces.

LINEAR	IP 40	CLASS III	10W/m
PROTECTION			POWER

90	45°	Remote
CRI	BEAM	DRIVER

GENERAL

Category	Recessed linear
Environment	Indoor
IP rating	IP40
Installation	Recessed in shelves
Power	10W/m
Colour temperature	750LM/m
Colour rendering (CRI)	90

OPTICS

Emission	Direct
LED source	LED strip
Distribution	Wide
Optics	Refractive PMMA lens
Beam angle	45°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	See drawing
Weight	0.024Kg/m
Finish	Natural anodised
Material	Aluminium, PMMA

TECHNICAL DRAWINGS AND DETAILS

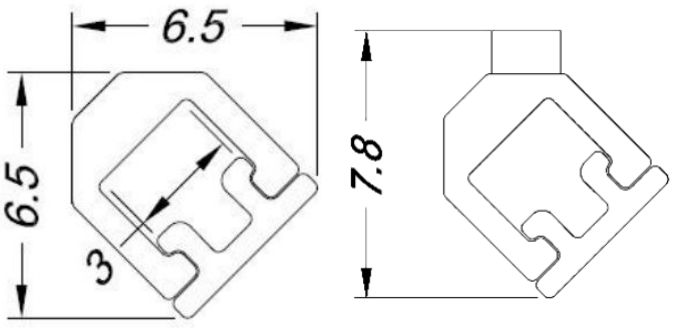

NOTES

- All features are to be confirmed following prototype analysis.
- Dimmable on request with external remote driver.
- Driver to be ordered separately.
- The luminaire must be powered every two and a half metres.
- Mechanical and optical features are fully customisable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K.
- Magnetic fixing.