BOOST M EVO *Outdoor and wet locations*



Adjustable outdoor LED projector for general outdoor architectural lighting installations. Aluminium body, grey paint finish.

WALL	IP 66 PROTECTION	CLASS I	11W POWER
4000K CCT	90 CRI	10° BEAM	Integrated DRIVER

GENERAL

Category	LED
Environment	Outdoor
IP rating	IP66
Installation	Wall / floor
Power	11W
Colour temperature	4000K
Colour rendering (CRI)	90
Source flux	1300Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED Mid Power
Distribution	Symmetric
Optics	Refractive PMMA
Beam angle	10°


ELECTRICAL

Driver	Integrated
Power supply	230Vac
Insulation class	I

MECHANICAL

Dimensions	See drawing
Weight	250gr
Finish	Grey
Material	Die-cast aluminium
Rotation	90°
Tilt	+ / - 180°

TECHNICAL DRAWINGS AND DETAILS

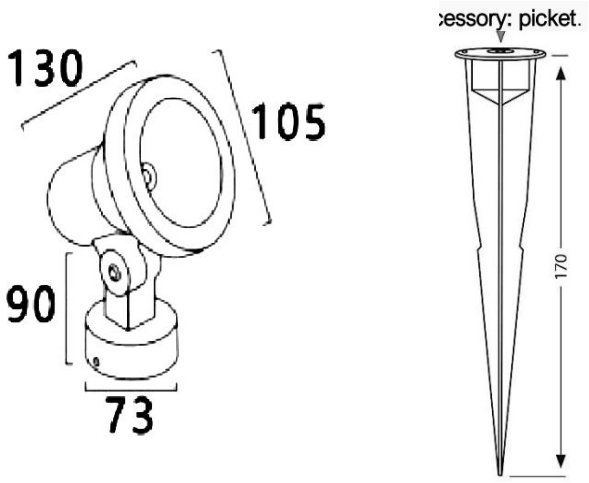

NOTES

- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- BOZZA. All features must be confirmed.

ACCESSORIES AND OPTIONS

- Accessory: ground spike.