NOVA WASHER 4×1 *Surface-mounted and magnetic lights*



Wall washer LED luminaire for indoor installation, individually or in continuous rows, to light walls in both uplight and downlight. Designed for art galleries, museums or private installations, it combines efficiency and reliability. In-Out through wiring to speed up installation. DALI dimmable with integrated driver. Supplied with tilt adjustment bracket to optimise beam orientation.

SURFACE	IP 20 PROTECTION	CLASS I	16W POWER
3000K CCT	>90 CRI	Integrated DRIVER	

CONTROL DALI Push

GENERAL

Category	LED
Environment	Indoor
IP rating	IP20
Installation	Suspension/ceiling
Power	16W
Colour temperature	3000K
Colour rendering (CRI)	>90
Source flux	2150lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED Mid Power
Distribution	Total reflection
Optics	Linear reflectors
Beam angle	Wall washer


ELECTRICAL

Driver	On board
Power supply	220 Vac
Insulation class	I

MECHANICAL

Dimensions	290×117×55mm
Weight	1 kg (to be confirmed)
Finish	Any RAL or NCS code
Material	Plastic - aluminium
Rotation	To be confirmed
Tilt	+/- 40°

TECHNICAL DRAWINGS AND DETAILS

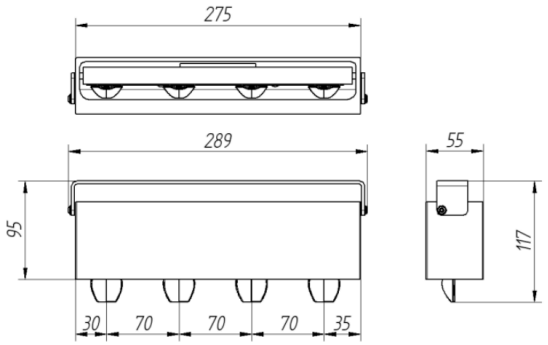

NOTES

- DALI dimmable, Push dimmable
- All dimensions are to be confirmed through prototype analysis.