E7.4 - CHESS 1X *Recessed and gimbal lights*



Miniaturised square recessed luminaire for a single LED, with fixed optics. Recessed with steel wire springs for false ceilings.

RECESSED	IP 20 PROTECTION	CLASS III	2W POWER
3000K CCT	>90 CRI	30° BEAM	Remote DRIVER

CONTROL DALI

GENERAL

Category	LED
Environment	Indoor
IP rating	IP20
Installation	Ceiling recessed
Power	2W
Colour temperature	3000K
Colour rendering (CRI)	>90
Luminaire flux	150lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Spot
Optics	Refractive optics
Beam angle	30°


ELECTRICAL

Driver	Remote
Power supply	500mA
Insulation class	III

MECHANICAL

Dimensions	45×45mm
Recess cut-out	37X37mm
Finish	White
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

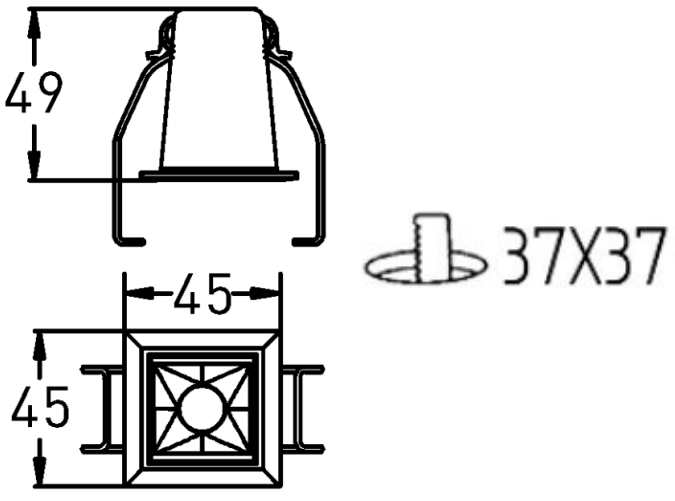

NOTES

- DALI dimmable.