LINEAR DOT MINI TRACK *Linear track luminaire*



Linear LED luminaire for installation on low-voltage mini track. Dotted line beam. Aluminium body, PMMA lens. Direct light. DALI dimmable on request.

TRACK	IP 40 PROTECTION	CLASS III	25W/m POWER
3000K CCT	>90 CRI	50° BEAM	Remote DRIVER

CONTROL · ON REQUEST DALI

GENERAL

Category	Linear track luminaire
Environment	Indoor
IP rating	IP40
Installation	Electrified mini track
Power	25W/m
Colour temperature	3000K
Colour rendering (CRI)	>90
Luminaire flux	2024Lm

OPTICS

Emission	Direct
LED source	LED SMD
Distribution	Spot
Optics	Refractive
Beam angle	50°
UGR	<19


ELECTRICAL

Driver	Remote
Power supply	48Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	See drawing
Weight	0.47Kg
Finish	Black or white paint finish
Material	Aluminium, PMMA

TECHNICAL DRAWINGS AND DETAILS

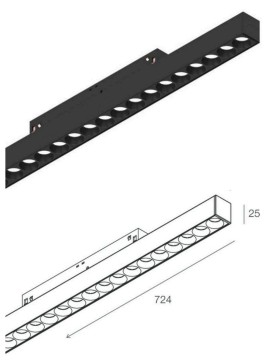

NOTES

- Dimmable on request with remote external driver.
- Driver to be ordered separately.
- Available in the following colour temperatures: 3000K, 4000K.