NOVA NOVA S FL WOOD Q *Recessed downlight*



Adjustable trimless LED luminaire, recessed in false ceilings with metal recessed housing. Aluminium body, PMMA lens, direct light. Very high R9 value, for naturally saturated red colour rendering. Wood-finish reflector for flush installation on wooden ceilings. Adjustable brackets to fit wooden false ceilings of different thicknesses.

RECESSED	IP 40	CLASS III	6W
PROTECTION			POWER
3000K	**95**	**24°**	**Remote**
CCT	CRI	BEAM	DRIVER

GENERAL

Category	Recessed downlight
Environment	Indoor
IP rating	IP40
Installation	Recessed in false ceiling
Power	6W
Colour temperature	3000K
Colour rendering (CRI)	95
R9	97
Source flux	633lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	PMMA lens, refractor
Beam angle	24°


ELECTRICAL

Driver	Remote
Power supply	350 mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	55×55mm
Weight	120gr
Finish	Anodised
Material	Aluminium
Rotation	360°
Tilt	+/-25°

TECHNICAL DRAWINGS AND DETAILS

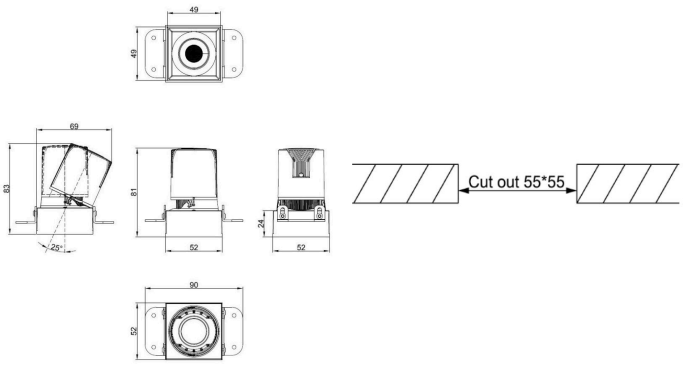

NOTES

- Dimmable with external remote constant current driver.
- Driver to be ordered separately.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following beam angles: 24°, 35°.