SS01 - HANGAR *Step light / wall light*



IP65 outdoor diffused-light LED luminaire for general outdoor architectural lighting installations. Suitable for wall or floor installations. Custom paint finish according to RAL or NCS codes.

STEP LIGHT	IP 65	CLASS III	7W
PROTECTION			POWER
2700K	**90**	**120°**	**Remote**
CCT	CRI	BEAM	DRIVER

CONTROL · ON REQUEST **DALI**

GENERAL

Category	Step light / wall light
Environment	Outdoor
IP rating	IP65
Installation	Wall / floor
Power	7W
Colour temperature	2700K
Colour rendering (CRI)	90
Source flux	750Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED Mid Power
Distribution	Asymmetric
Optics	Lambertian
Beam angle	120°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	800gr
Finish	Custom (to be defined)
Material	Steel/aluminium (to be defined)

TECHNICAL DRAWINGS AND DETAILS

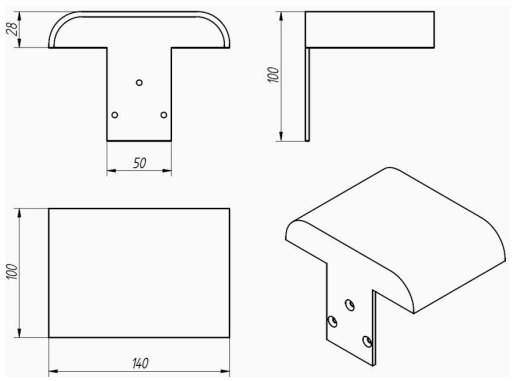

NOTES

- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- DALI dimmable on request.
- Remote driver to be ordered separately.
- Also available with dual light emission.
- BOZZA. All features must be confirmed.