JEMMA FL *Ceiling-mounted*



Fixed decorative LED luminaire with a crystalline, transparent shape, for general lighting. Supplied with recessed housing for false ceiling installation. Aluminium heat sink, faceted prismatic PMMA surface. CRI90 LED source, for a light spectrum with naturally saturated colours. Dimmable.

RECESSED	IP 40 PROTECTION	CLASS III	12W POWER
3000K CCT	90 CRI	Remote DRIVER	

CONTROL · ON REQUEST DALI Casambi

GENERAL

Category	Ceiling-mounted
Environment	Indoor
IP rating	IP40
Installation	In false ceiling
Power	12W
Colour temperature	3000K
Colour rendering (CRI)	90
Source flux	1680Lm
Luminaire flux	See photometric data
Luminous efficacy	140Lm/W

OPTICS

Emission	Decorative downlight
LED source	LED COB
Distribution	Asymmetric
Optics	Refractive/diffusing optics


ELECTRICAL

Driver	Remote
Power supply	350mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	0.60 kg
Finish	Any RAL and NCS code
Material	Aluminium/PMMA

TECHNICAL DRAWINGS AND DETAILS

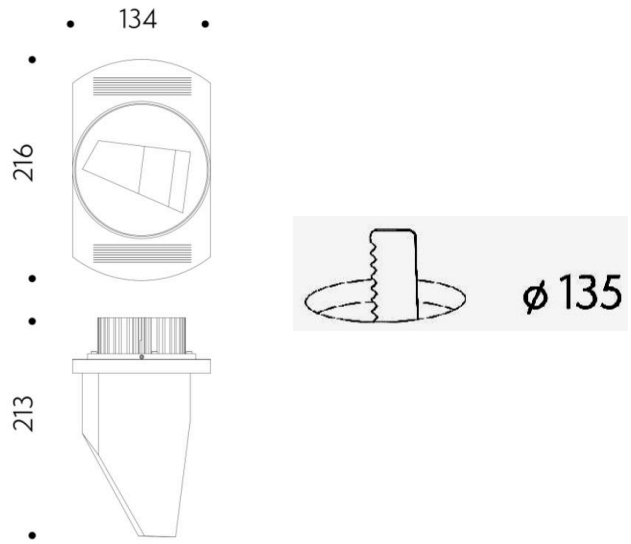

NOTES

- Mechanical and optical features are fully customisable.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Remote driver to be ordered separately.
- DALI 2 or Casambi dimmable on request.