
CANNON MSP PLAFO 50 *Ceiling projector*

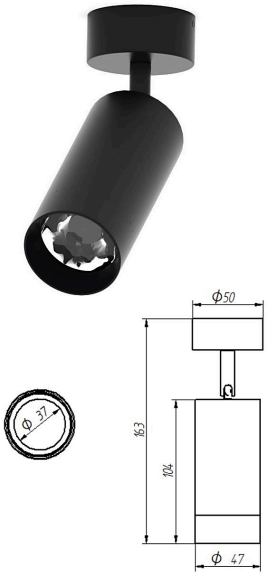

Adjustable surface-mounted LED projector for general lighting installations. Aluminium body, PMMA lens. Paint finishes according to RAL or NCS codes. Very high R9 value for naturally saturated red colour rendering.

SURFACE	IP 40 PROTECTION	CLASS III	12W POWER
3000K CCT	98 CRI	15° BEAM	Remote DRIVER

CONTROL · ON REQUEST **DALI**

GENERAL

Category	Ceiling projector
Environment	Indoor
IP rating	IP40
Installation	Ceiling-mounted with screws
Power	12W
Colour temperature	3000K
Colour rendering (CRI)	98
R9	97
Source flux	1332Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Refractive optics
Beam angle	15°


ELECTRICAL


Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	350gr
Finish	Any RAL and NCS code
Material	Aluminium
Rotation	+/- 180°
Tilt	90°

TECHNICAL DRAWINGS AND DETAILS





NOTES

- Mechanical and optical features are fully customisable.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following light beams: 15°, 25°, 40°, 60°.
- DALI 2 dimmable on request.

ACCESSORIES AND OPTIONS

- Optional: gloss black painted collar for anti-glare effect.
- Optional galvanic finishes (e.g. gold, nickel, burnishing).
- Optional: honeycomb anti-glare filter.
- Optional: barn doors.