TORQUE *Outdoor and wet locations*



Adjustable IP65 LED projector. Powder-coated anodised aluminium body.

GROUND	IP 65 PROTECTION	CLASS III	9W POWER
2700–4000K CCT	80–97 CRI	Remote DRIVER	

GENERAL

Category	LED
Environment	Outdoor
IP rating	IP65
Installation	Ground-mounted
Power	9W
Colour temperature	2700K, 3000K, 3500K, 4000K
Colour rendering (CRI)	80 · 90 · 95 · 97
Luminaire flux	660lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Spot
Optics	Refractive lens
Beam angle	24/38/60/Elliptical


ELECTRICAL

Driver	Remote
Power supply	24 Vdc
Insulation class	III

MECHANICAL

Finish	According to RAL and NCS codes
Material	Aluminium
Rotation	355°
Tilt	180°

TECHNICAL DRAWINGS AND DETAILS

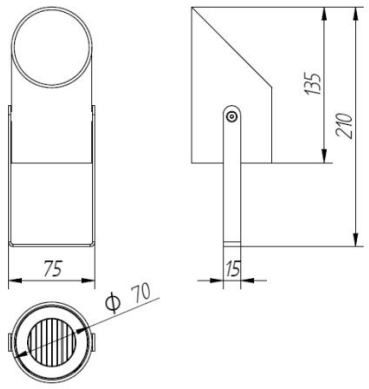

NOTES

– Dimmable with constant current driver not included.