SMART CANNON L3 PLA

Surface-mounted and magnetic lights



Fixed surface-mounted LED projector for general lighting installations. Aluminium body, PMMA lens. On-board driver for 220Vac mains voltage. Paint finishes according to RAL or NCS codes. Very high R9 value for naturally saturated red colour rendering.

SURFACE	IP 40 PROTECTION	CLASS II	6W POWER
2700K CCT	>90 CRI	60° BEAM	Integrated DRIVER

GENERAL

Category	LED
Environment	Indoor
IP rating	IP40
Installation	Ceiling
Power	6W
Colour temperature	2700K
Colour rendering (CRI)	>90
Source flux	740lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Spot
Beam angle	60°


ELECTRICAL

Driver	On board
Insulation class	II

MECHANICAL

Dimensions	See drawing
Finish	RAL9003
Material	Aluminium
Rotation	Fixed
Tilt	Fixed

TECHNICAL DRAWINGS AND DETAILS

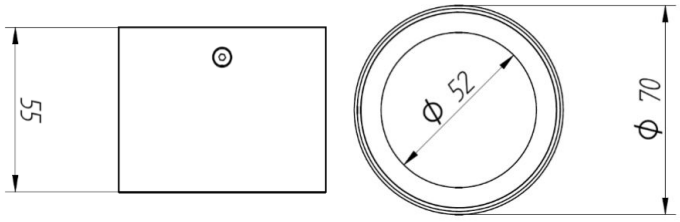

NOTES

- Mechanical and optical features are fully customisable.
- Gloss black painted collar for anti-glare effect.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following light beams: 15°, 25°, 40°, 60°.

ACCESSORIES AND OPTIONS

- Optional galvanic finishes (e.g. gold, nickel, burnishing).