
LEILA 1X *Surface-mounted luminaire*

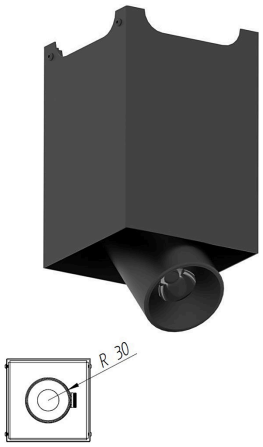

Surface-mounted luminaire with one adjustable and removable spotlight. Drivers are remote and cannot be integrated into the spotlight. Medium-gloss black finish, with gloss black painted collar for anti-glare effect. Ceiling fixing screws not supplied, to be chosen according to the type of ceiling.

SURFACE	IP 40	CLASS III	20W
	PROTECTION		POWER

2700K	38°	Remote
CCT	BEAM	DRIVER

GENERAL

Category	Surface-mounted luminaire
Environment	Indoor
IP rating	IP40
Installation	Ceiling-mounted with screws (not supplied)
Power	20W
Colour temperature	2700K

OPTICS

Emission	Direct
LED source	COB
Distribution	Symmetric
Optics	Refractive optics (to be confirmed)
Beam angle	38°


ELECTRICAL

Driver	Remote
Power supply	500mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	300gr
Finish	RAL9005
Material	Aluminium, PMMA
Rotation	359°
Tilt	0/40°

TECHNICAL DRAWINGS AND DETAILS

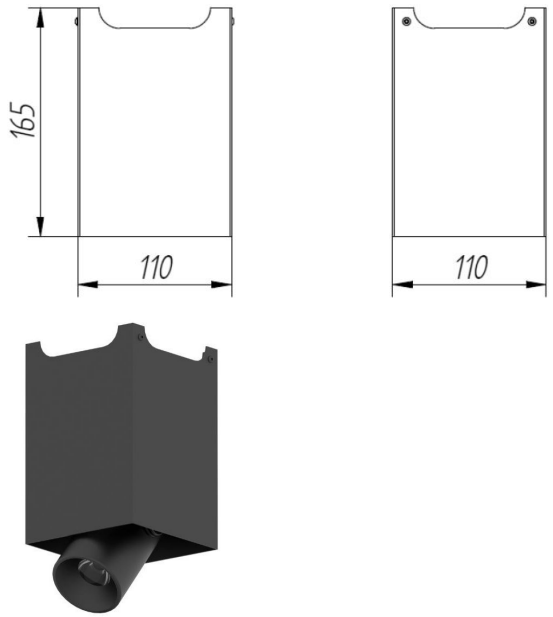

NOTES

- Mechanical and optical features are fully customisable.
- Driver to be quoted separately.
- Also available in the following colour temperatures: RGBW, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.

ACCESSORIES AND OPTIONS

- Optional galvanic finishes, quoted separately.