TRIMLESS RECESSED TRACK *Track*




The Lucenova 4-conductor low-voltage electrified mini track, trimless recessed, is a Class III - SELV product. Supply voltage must be between 0 and 60 Vdc and supply current must not exceed 15 A. Ambient temperature must be 25°C, while operating temperature must not exceed 70°C. The 4 track conductors can be used to create two separate power circuits, or one power circuit and one for the DATA BUS.

TRACK | IP 20 PROTECTION | CLASS III

GENERAL	
IP rating	IP20
ELECTRICAL	
Insulation class	III

MECHANICAL	
Dimensions	1m
Weight	1.5 Kg/m

TECHNICAL DRAWINGS AND DETAILS

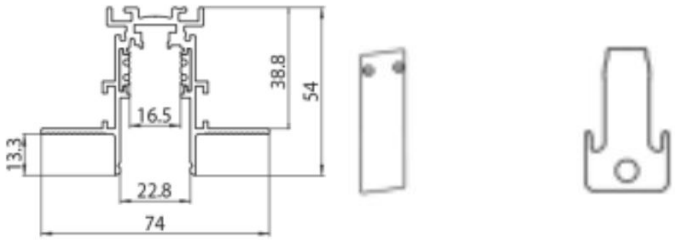

NOTES

– A range of accessories is available to install, connect and suspend the mini track.