KOR *Outdoor and wet locations*



IP65

IP65 in-ground recessed LED step light for architectural lighting applications. Supplied with recessed housing as an installation accessory. Aluminium body.

WALL	IP 66 PROTECTION	CLASS III	6W POWER
2700K CCT	>90 CRI	Remote DRIVER	

GENERAL

Category	COB LED
Environment	Outdoor
IP rating	IP66
Installation	Ground or wall installation
Power	6W
Colour temperature	2700K
Colour rendering (CRI)	>90
Source flux	670lm

OPTICS

Emission	Step light
LED source	LED COB
Distribution	Asymmetric
Optics	Acrylic diffuser
Beam angle	Wide


ELECTRICAL

Driver	Remote
Power supply	350mA o 24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	See drawing
Weight	250gr
Finish	Any RAL or NCS code
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

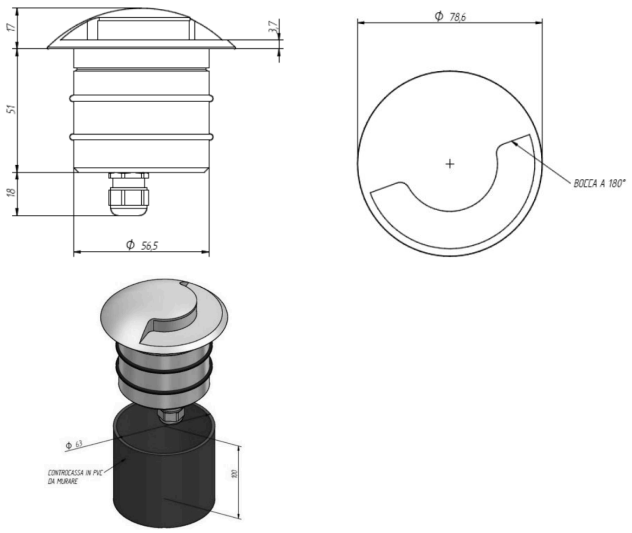

NOTES

- Dimmable with external driver to be ordered separately.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 6500K.
- Custom galvanic finishes available
- AISI 316L stainless steel flange available for saline environments