BOOST M EVO IP65 *Outdoor and wet locations*



Fully adjustable surface-mounted LED projector for 220Vac applications. IP65 protection rating. Integrated on-board driver.

PROJECTOR	IP 66 PROTECTION	CLASS I	10W POWER
4000K CCT	90 CRI	60° BEAM	Integrated DRIVER

CONTROL **Triac**

GENERAL

Category	LED
Environment	Outdoor
IP rating	IP66
Installation	Surface-mounted
Power	10W
Colour temperature	4000K
Colour rendering (CRI)	90
Source flux	800 lm

OPTICS

Emission	Direct
LED source	DOB
Distribution	Symmetric
Optics	Wide
Beam angle	60°


ELECTRICAL

Driver	Integrated
Power supply	220 Vac
Insulation class	I

MECHANICAL

Dimensions	See drawing
Weight	Approx. 1 kg
Finish	Anthracite
Material	Metal
Rotation	180°
Tilt	90°

TECHNICAL DRAWINGS AND DETAILS

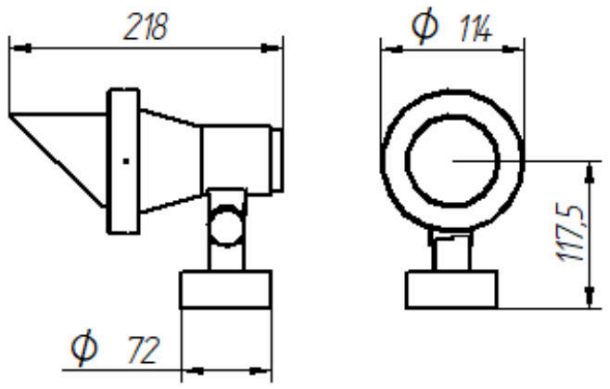

NOTES

– TRIAC dimmable.

ACCESSORIES AND OPTIONS

– Optional: ground spike.