RES *Outdoor and wet locations*



LED luminaire for wall installation. Aluminium body, galvanised steel support bracket. Direct light.

WALL	IP 65	24W	3000 · 4000K
	PROTECTION	POWER	CCT

GENERAL

Installation	Wall-mounted
Power	24W
IP rating	IP65
Colour temperature	3000K, 4000K
Luminaire flux	1900 lumens

OPTICS

Emission	Direct
LED source	8x Cree XpG
Optics	Spot, Medium or Wide


ELECTRICAL

Power supply	100-270Vac - 700mA
Control	Dimmable 1-10

MECHANICAL

Dimensions	See drawing
Finish	Corten or Anthracite
Material	Aluminium body, galvanized steel support pole

TECHNICAL DRAWINGS AND DETAILS

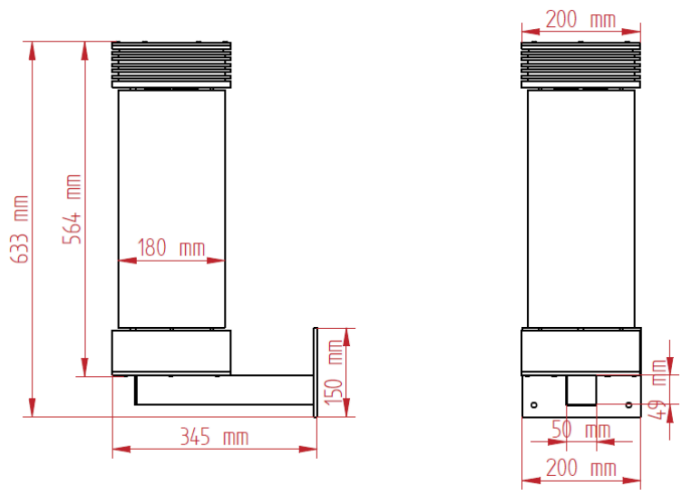

NOTES

- Available in different heights.
- Made in Italy.
- Other colours available on request.