
LOW VOLTAGE MICRO TRACK *Electrified track*

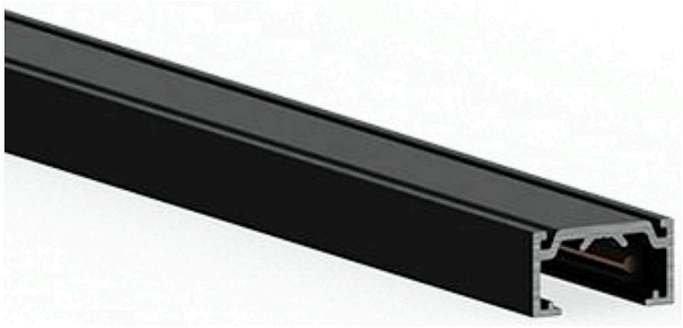

The Lucenova low-voltage micro track is a Class III – SELV product. Supply voltage must be between 0 and 60 VDC and supply current must not exceed 10 A. 4-conductor electrified track for ceiling/wall installation. Track for non-polarised versions. Power supply only with 24Vdc or 48Vdc Class 2 driver.

TRACK | IP 20 PROTECTION | CLASS III


GENERAL	
Category	Electrified track
Environment	Indoor
IP rating	IP20
Installation	Ceiling/wall mounting

ELECTRICAL	
Power supply	0-60Vdc · 10A
Insulation class	III

MECHANICAL	
Dimensions	Standard lengths 2-3m
Weight	L:2m (635.4g) L:3m (953.9g)
Finish	Any RAL and NCS code
Material	Aluminium, PVC, copper

OTHER DATA	
Load	L:2m (15Kg) L:3m(24Kg)

TECHNICAL DRAWINGS AND DETAILS

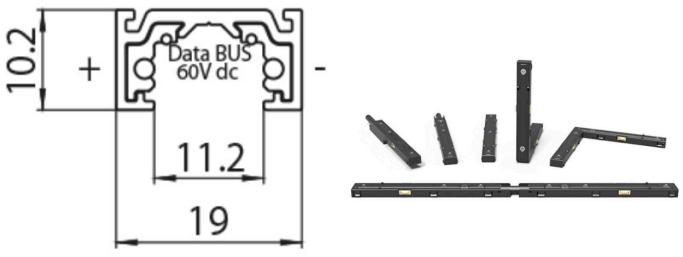

NOTES

– Lengths and finishes are fully customisable.