
HERO M FL IP20 *Recessed downlight*

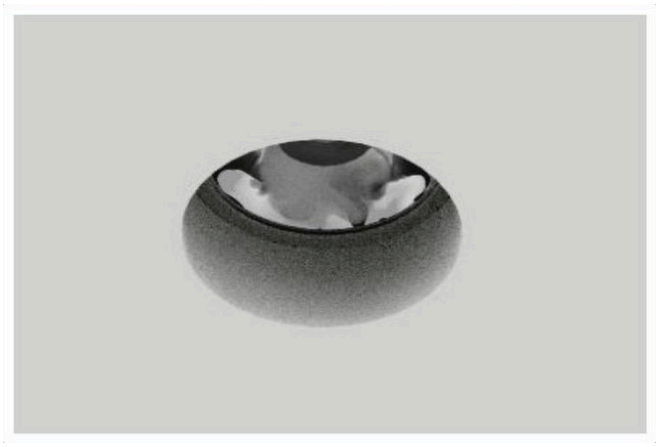

LED luminaire recessed in false ceilings with recessed housing. Trimless. Aluminium body. Very high R9 value, for naturally saturated red colour rendering.

RECESSED	IP 20 PROTECTION	CLASS III	10W POWER
2700K CCT	98 CRI	15–60° BEAM	Remote DRIVER

GENERAL

Category	Recessed downlight
Environment	Indoor
IP rating	IP20
Installation	Ceiling recessed
Power	10W
Colour temperature	2700K
Colour rendering (CRI)	98
R9	97
Source flux	1027lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	Refractive
Beam angle	15°, 25°, 35, 60°


ELECTRICAL

Driver	Remote
Power supply	600mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø55mm
Weight	200gr
Finish	Any RAL and NCS code
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

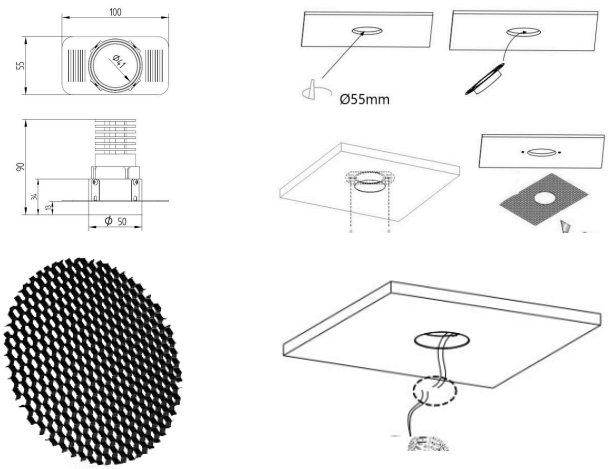

NOTES

- Fully customisable luminaire.
- Available in a constant voltage version.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following beam angles: 15°, 25°, 38°, 60°.

ACCESSORIES AND OPTIONS

- Optional: honeycomb anti-glare filter.