LILY MSP PLUS ROUND

Recessed and gimbal lights



Adjustable trimless LED luminaire, recessed in false ceilings with metal recessed housing. Aluminium body, PMMA lens, direct light. Very high R9 value, for naturally saturated red colour rendering.

RECESSED	IP 20	CLASS III	15W
PROTECTION			POWER
3000K	**95**	**38°**	**Remote**
CCT	CRI	BEAM	DRIVER

GENERAL

Category	LED
Environment	Indoor
IP rating	IP20
Installation	Ceiling recessed
Power	15W
Colour temperature	3000K
Colour rendering (CRI)	95
Source flux	1835lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Refractive optics
Beam angle	38°


ELECTRICAL

Driver	Remote
Power supply	450 mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø65mm
Weight	350gr
Finish	Any RAL or NCS code
Material	Aluminium/PMMA
Rotation	360°
Tilt	+/- 30°

TECHNICAL DRAWINGS AND DETAILS

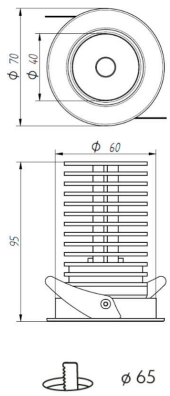

NOTES

- Dimmable with external remote constant current driver.
- Driver to be ordered separately.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following beam angles: 15°, 24°, 38°, 60°.