JUPITER IP65 *Outdoor and wet locations*



Fully customisable IP65 LED luminaire for outdoor ground installation with recessed housing. Aluminium body, PMMA lens. Direct light. Paint finish according to RAL and NCS codes. The opal emitting surface softens the light beam and reduces light pollution and glare. Very high R9 value for naturally saturated red colour rendering.

PROJECTOR	IP 65 PROTECTION	CLASS III	10W POWER
2700K CCT	>85–90 CRI	170° BEAM	Remote DRIVER

GENERAL

Category	COB LED
Environment	Outdoor
IP rating	IP65
Installation	On surfaces
Power	10W
Colour temperature	2700K
Colour rendering (CRI)	>90 · 850Lm

OPTICS

Emission	IP65 uplight
LED source	COB LED
Distribution	Lambertian
Optics	Diffuse
Beam angle	170°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	See drawing
Weight	250gr
Finish	To be defined
Material	Aluminium, iron

TECHNICAL DRAWINGS AND DETAILS

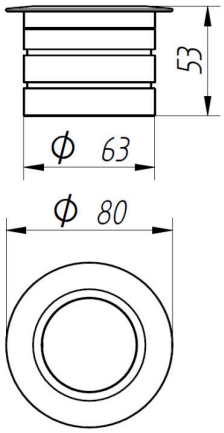

NOTES

- Dimmable with external remote dimming system to be ordered separately.
- Driver to be ordered separately.
- Mechanical and optical features are fully customisable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following light beams: 15°, 25°, 38°, 60°, 170° opal.

ACCESSORIES AND OPTIONS

- Recessed housing to be ordered separately.