# NOVA NOVA M ETL FL *Recessed downlight*





Adjustable trimless LED luminaire, recessed in false ceilings with metal recessed housing. Aluminium body, PMMA lens, direct light.

| RECESSED | IP 44 | CLASS III | 12W |
|---|---|---|---|
| PROTECTION | | | POWER |
| **3000K** | **>90** | **36°** | **Remote** |
| CCT | CRI | BEAM | DRIVER |

## GENERAL

| | |
|---|---|
| Category | Recessed downlight |
| Environment | Indoor |
| IP rating | IP44 |
| Installation | Recessed in false ceiling |
| Power | 12W |
| Colour temperature | 3000K |
| Colour rendering (CRI) | >90 |
| Source flux | 1055lm |
| Luminaire flux | See photometric data |

## OPTICS

| | |
|---|---|
| Emission | Direct |
| LED source | COB LED |
| Distribution | Symmetric |
| Optics | PMMA lens, refractor |
| Beam angle | 36° |


## ELECTRICAL

| | |
|---|---|
| Driver | Remote |
| Power supply | 120Vac |
| Insulation class | III |

## MECHANICAL

| | |
|---|---|
| Dimensions | See drawing |
| Recess cut-out | See drawing |
| Weight | 0.25Kg |
| Finish | White trim + black mirror reflector |
| Material | Aluminium |
| Rotation | 360° |
| Tilt | +/-30° |

TECHNICAL DRAWINGS AND DETAILS

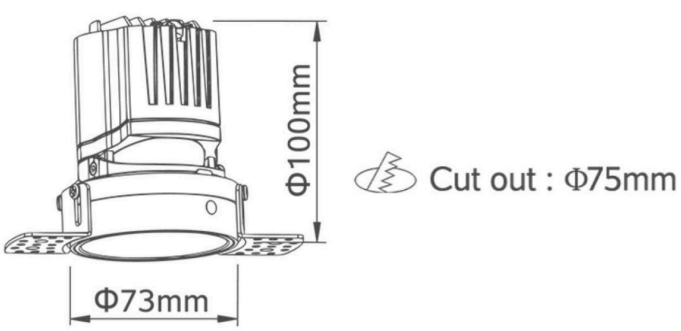


NOTES

- Dimmable with external remote constant current driver.
- Driver to be ordered separately.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K.
- Available with the following beam angles: 15°, 24°, 36°.