MONOLITH MSH+ BINARIO *Track*



Fully adjustable LED luminaire for track installation. Aluminium body, direct light. Integrated driver.

TRACK	IP 20 PROTECTION	CLASS I	18W POWER
3500K CCT	95 CRI	38° BEAM	Integrated DRIVER

GENERAL

Category	LED
Environment	Indoor
IP rating	IP20
Installation	Track
Power	18W
Colour temperature	3500K
Colour rendering (CRI)	95
Source flux	2203lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Spot
Optics	Refractive optics
Beam angle	38°


ELECTRICAL

Driver	On board
Power supply	220Vac
Insulation class	I

MECHANICAL

Dimensions	See drawing
Weight	200g
Finish	RAL9005
Material	Aluminium
Rotation	360°
Tilt	90°

TECHNICAL DRAWINGS AND DETAILS

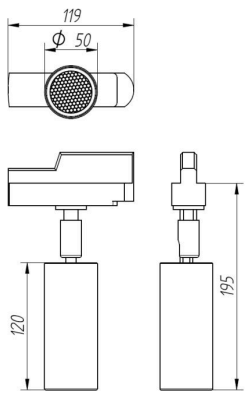

ACCESSORIES AND OPTIONS

– Anti-glare filter.