# ZUMY M TRACK B *Zoom projector*



Zoom projector suitable for art galleries, stage lighting and lighting effects. Adapter for installation on Eurostandard track. Body painted according to RAL codes. High CRI and R9 values, for naturally saturated red colour rendering. Available in a DALI version.

| TRACK | IP 20 PROTECTION | CLASS II | 15W POWER |
|---|---|---|---|
| 3000K CCT | 90 CRI | 10–50° BEAM | Integrated DRIVER |

CONTROL DALI



## GENERAL

| | |
|---|---|
| Category | Zoom projector |
| Environment | Indoor |
| IP rating | IP20 |
| Installation | EuroTrack |
| Power | 15W |
| Colour temperature | 3000K |
| Colour rendering (CRI) | 90 |
| Source flux | 920 Lm |

## OPTICS

| | |
|---|---|
| Emission | Direct |
| LED source | COB |
| Distribution | Spot/wide |
| Optics | Zoom |
| Beam angle | 10° / 50° |


## ELECTRICAL

| | |
|---|---|
| Driver | On board |
| Power supply | 220Vac |
| Insulation class | II |

## MECHANICAL

| | |
|---|---|
| Dimensions | See drawing |
| Weight | 750gr |
| Finish | White |
| Material | Aluminium |
| Rotation | 0°/90° |
| Tilt | 359° |

TECHNICAL DRAWINGS AND DETAILS

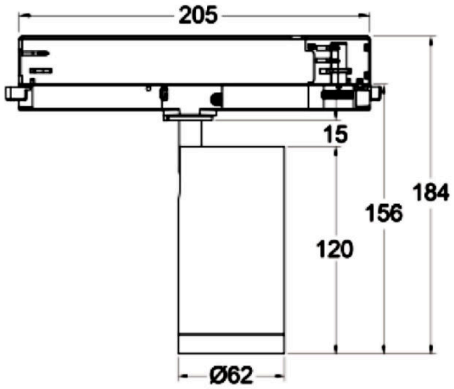


NOTES

- DALI dimmable.
- Available in colour temperatures 2700K, 3000K, 4000K.
- Body colour available made-to-measure in any RAL or NCS paint finish.