
NANO TRACK SPOT *Nano track projector*

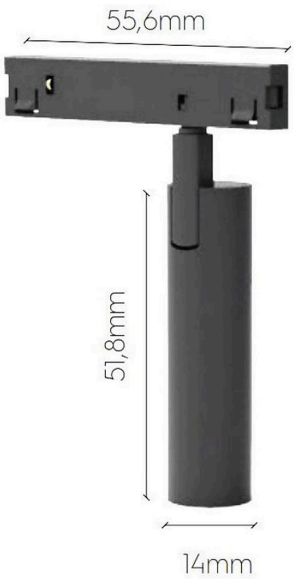

LED luminaire for installation on low-voltage nano track. Aluminium body, PMMA lens, direct light. Paint finish according to RAL and NCS codes.

TRACK	IP 40 PROTECTION	CLASS III	2W POWER
2700K CCT	90 CRI	34° BEAM	Remote DRIVER

GENERAL

Category	Nano track projector
Environment	Indoor
IP rating	IP40
Installation	Electrified nano track
Power	2W
Colour temperature	2700K
Colour rendering (CRI)	90
Luminaire flux	70 lm

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	PMMA lens, refractor
Beam angle	34°

ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	20g
Finish	Any RAL or NCS code
Material	Aluminium
Rotation	360°
Tilt	+/- 90°

NOTES

- Tracks and drivers to be ordered separately.
- Mechanical and optical features are fully customisable on request.
- Available in the following colour temperatures: 3000K, 4000K.