
NOVABOX SZ 3X FL *Recessed downlight*

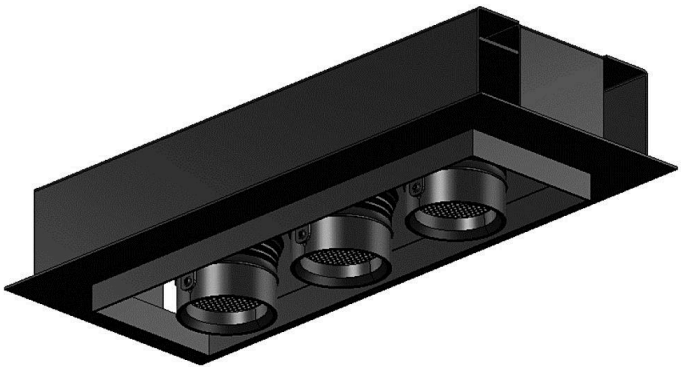

Adjustable, fully customisable LED luminaire, recessed in false ceilings with recessed housing. Aluminium body, PMMA lens, direct light. Paint finish according to RAL and NCS codes. Honeycomb grid for an anti-glare effect. Very high R9 value, for naturally saturated red colour rendering.

RECESSED	IP 40	CLASS III	21W
PROTECTION			POWER
3000K	**95**	**15°**	**Remote**
CCT	CRI	BEAM	DRIVER

GENERAL

Category	Recessed downlight
Environment	Indoor
IP rating	IP40
Installation	Recessed in false ceiling
Power	3×21W
Colour temperature	3000K
Colour rendering (CRI)	95
R9	97
Luminaire flux	3x2164lm · See photometric data

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	PMMA lens, refractor
Beam angle	15°

ELECTRICAL

Driver	Remote
Power supply	3×600 mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Diam. 92mm
Weight	5000gr
Finish	RAL9005
Material	Aluminium, sheet iron
Rotation	360°
Tilt	+/-30°

NOTES

- Dimmable with external remote constant current driver.
- Driver to be ordered separately.
- Mechanical and optical features are fully customisable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following beam angles: 15°, 30°, 60°.
- DRAFT: mechanical and physical features are to be confirmed.

TECHNICAL DRAWINGS AND DETAILS

