MINI JUPITER *Outdoor and wet locations*

IP65 single-emission LED uplight; aluminium alloy.
Recessed housing to be ordered separately.



RECESSED	IP 65 PROTECTION	CLASS III	3W POWER
3000K CCT	90 CRI	25° BEAM	Remote DRIVER

GENERAL

Category	LED
Environment	Outdoor
IP rating	IP65
Installation	Recessed
Power	3W
Colour temperature	3000K
Colour rendering (CRI)	90
Source flux	270 lm

OPTICS

Emission	Direct
LED source	LED array
Distribution	Symmetric
Optics	Wide
Beam angle	25°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø40
Weight	60gr
Finish	All RAL and NCS codes
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

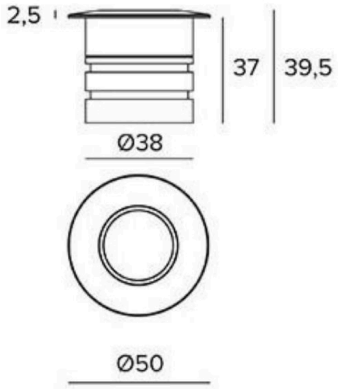

NOTES

- Dimmable with external constant voltage driver to be ordered separately.
- Available with the following optics: 15°, 25°, 40°, 60°.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 6500K.
- Custom galvanic finishes available
- AISI 316L stainless steel flange available for saline environments