JUPITER PROJECTOR *Adjustable projector*



Adjustable outdoor LED projector with IP65 protection rating, for general architectural lighting. Suitable for installation in gardens, lawns, among shrubs or along outdoor paths. Aluminium body, glass screen, PMMA lens. Paint finishes according to RAL or NCS codes.

WALL	IP 65 PROTECTION	CLASS III	9W POWER
3000K CCT	97 CRI	24° BEAM	Remote DRIVER

GENERAL

Category	Adjustable projector
Environment	Outdoor
IP rating	IP65
Installation	Ground or wall-mounted
Power	9W
Colour temperature	3000K
Colour rendering (CRI)	Up to 97
Source flux	Up to 1080lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	COB
Distribution	Symmetric
Optics	Refractive lens
Beam angle	24°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	180gr
Finish	Any RAL or NCS code
Material	Aluminium
Rotation	+/- 180°
Tilt	+/- 180°

TECHNICAL DRAWINGS AND DETAILS

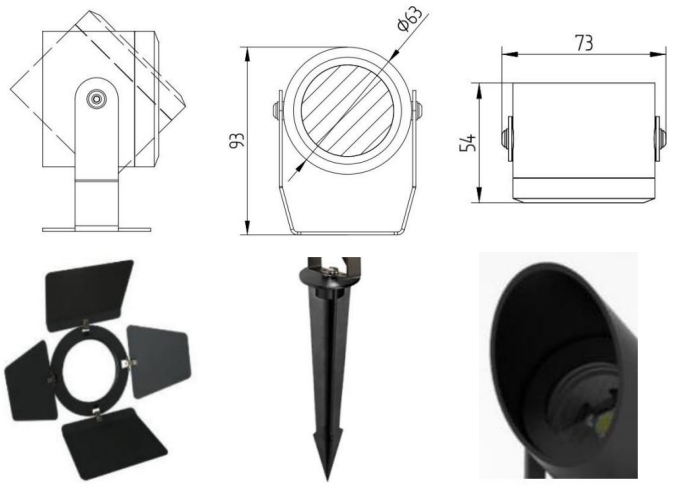

NOTES

- Also available with constant current power supply.
- Dimmable with constant current driver not included.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6000K.
- Available with the following beam angles: 18°, 24°, 38°, 60°.

ACCESSORIES AND OPTIONS

- Barn doors
- Ground spike
- Galvanic finishes