MICRO BOTTONE *Fixed mini downlight*



Very small recessed spotlight. Material: natural brass. Flange with matt black finish to minimise the outer halo on the lit surface. Suitable for installation in furniture or showcases. Recessed light source for an anti-glare experience.

SHOWCASE	IP 20 PROTECTION	CLASS III	1,5W POWER
2700K CCT	90 CRI	60° BEAM	Remote DRIVER

GENERAL

Category	Fixed mini downlight
Environment	Indoor
IP rating	IP20
Installation	Ceiling, showcase, shelves
Power	1.5W
Colour temperature	2700K
Colour rendering (CRI)	90
Source flux	170 lm

OPTICS

Emission	Direct
LED source	LED Mid Power
Distribution	Symmetric
Optics	Free beam
Beam angle	60°


ELECTRICAL

Driver	Remote
Power supply	350mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø12.5-13mm (to be confirmed)
Finish	Exterior: natural brass – Interior: matt RAL 9005
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

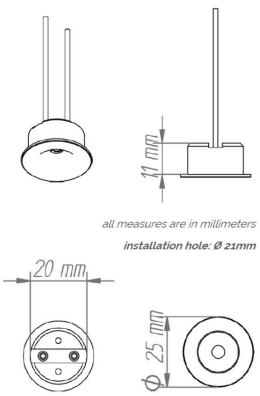

NOTES

- Remote driver to be selected according to the architectural design and the number of spotlights to be controlled.