
MORSE *Recessed linear*

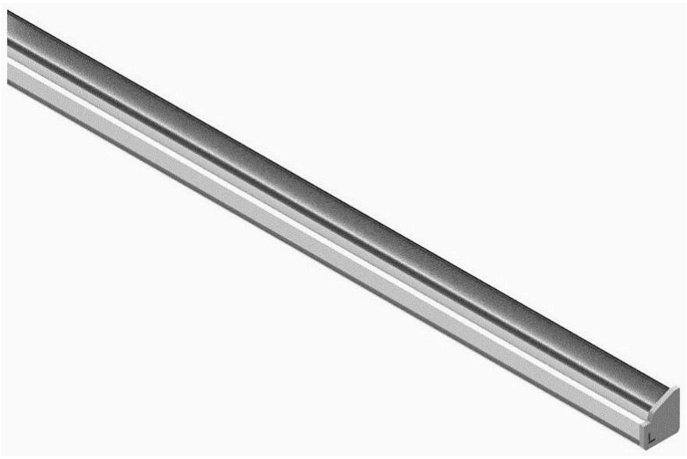

Fully customisable linear LED luminaire, recessed in showcases, displays and furniture. Available in made-to-measure lengths. Continuous linear emission, with a dot–line–dot effect on the lit objects. Aluminium body, PMMA lens, direct light. Very high R9 value, for naturally saturated red colour rendering. Dimmable.

LINEAR	IP 40 PROTECTION	CLASS III	30W/m POWER
3000K CCT	97 CRI	60° BEAM	Remote DRIVER

CONTROL · ON REQUEST — DALI · Casambi

GENERAL

Category	Recessed linear
Environment	Indoor
IP rating	IP40
Installation	Recessed in shelves
Power	30W/m
Colour temperature	3000K
Colour rendering (CRI)	97
R9	97
Source flux	2518Lm/m
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Asymmetric
Optics	Refractive opal PMMA lens
Beam angle	60°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	See drawing
Weight	0.6Kg/m
Finish	Natural anodised
Material	Aluminium, PMMA

TECHNICAL DRAWINGS AND DETAILS

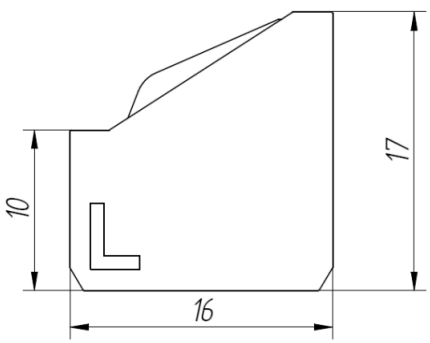

NOTES

- All features are to be confirmed following prototype analysis.
- DALI / Casambi dimmable on request, with external remote modules.
- Driver to be ordered separately.
- The luminaire must be powered every two and a half metres.
- Mechanical and optical features are fully customisable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K.
- Magnetic fixing on request.