
SMART ORION ZUMY M PLA IP65 *Zoom IP65*

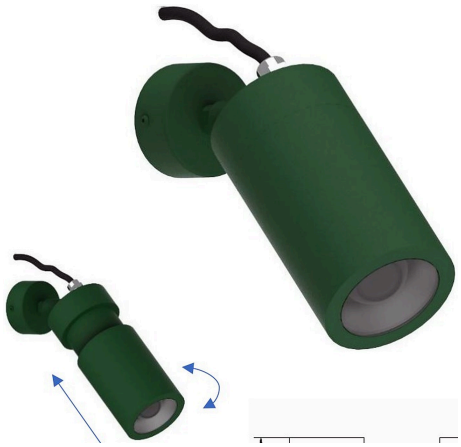

Adjustable outdoor LED projector with zoom and IP65 protection rating, for general architectural lighting. Luminaire with zoom to adapt the light beam to the subject. Aluminium body, glass lens. Paint finishes according to RAL or NCS codes. On-board driver.

WALL	IP 65 PROTECTION	CLASS II	12W POWER
3000K CCT	90 CRI	8–60° BEAM	Integrated DRIVER

CONTROL: DALI · Triac · 0-10V · Casambi

GENERAL

Category	Zoom IP65
Environment	Indoor and outdoor
IP rating	IP65
Installation	Wall and ceiling installation
Power	12W
Colour temperature	3000K
Colour rendering (CRI)	90
Source flux	1715Lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Glass lens
Beam angle	Zoom 8°/60°


ELECTRICAL


Driver	On board
Power supply	230 VAC
Insulation class	II

MECHANICAL


Dimensions	See drawing
Weight	1.450Kg
Finish	Black
Material	Aluminium
Rotation	359°
Tilt	+/- 90°

TECHNICAL DRAWINGS AND DETAILS









NOTES

- On/Off with integrated driver.
- Triac, DALI, 0-10V or Casambi with remote driver.
- CRI97 on request.

ACCESSORIES AND OPTIONS

- Barn doors
- Ground spike