MONOLITH M PLA FIX *Ceiling projector*



Fixed surface-mounted LED projector for general lighting installations. Aluminium body, PMMA lens. Paint finishes according to RAL or NCS codes. Very high R9 value for naturally saturated red colour rendering.

SURFACE	IP 40 PROTECTION	CLASS III	12W POWER
2700K CCT	98 CRI	35° BEAM	Remote DRIVER

GENERAL

Category	Ceiling projector
Environment	Indoor
IP rating	IP40
Installation	Ceiling-mounted with steel springs
Power	12W
Colour temperature	2700K
Colour rendering (CRI)	98
R9	97
Source flux	1456Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Refractive optics
Beam angle	35°


ELECTRICAL

Driver	Remote
Power supply	700mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	150gr
Finish	Any RAL and NCS code
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

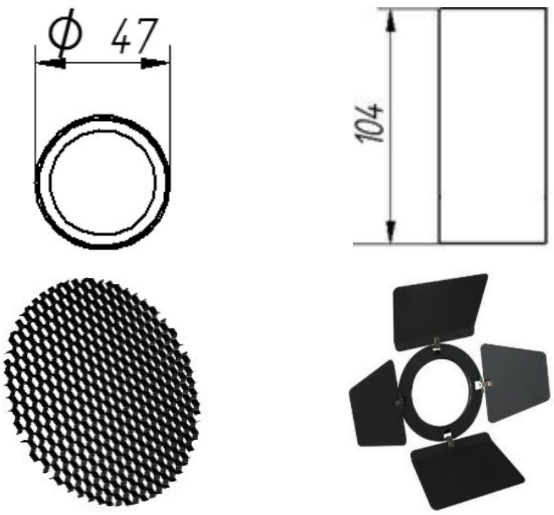

NOTES

- Mechanical and optical features are fully customisable.
- Gloss black painted collar for anti-glare effect.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following light beams: 15°, 25°, 40°, 60°.
- On/Off or dimmable driver to be ordered separately.

ACCESSORIES AND OPTIONS

- Optional galvanic finishes (e.g. gold, nickel, burnishing).
- Optional: honeycomb anti-glare filter.
- Optional: barn doors.