TRANTOR SLS BINARIO *Track projector*



Tiltable LED projector on Eurostandard track for general lighting. Aluminium body, PMMA lens, direct light. Paint finish according to RAL and NCS codes. Honeycomb grid for an anti-glare effect. Very high R9 value, for naturally saturated red colour rendering.

TRACK	IP 40 PROTECTION	CLASS III	22W POWER
3000K CCT	95 CRI	36° BEAM	Integrated DRIVER

GENERAL

Category	Track projector
Environment	Indoor
IP rating	IP40
Installation	Electrified Euro track
Power	22W
Colour temperature	3000K
Colour rendering (CRI)	95
R9	97
Source flux	2164lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	PMMA lens, refractor
Beam angle	36°


ELECTRICAL

Driver	On board
Power supply	220 VAC
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	350gr
Finish	Turned aluminium
Material	Aluminium
Rotation	360°
Tilt	+/-30°

TECHNICAL DRAWINGS AND DETAILS

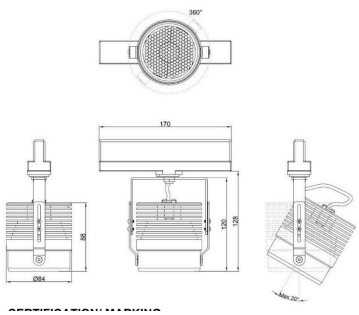

NOTES

- Dimmable with external remote constant current driver.
- Driver to be ordered separately.
- Mechanical and optical features are fully customisable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following beam angles: 15°, 36°, 60°.
- DRAFT: mechanical and physical features are to be confirmed.