IXAIP - APPLIQUE CILINDRICA BIEMISSIONE IP65

Outdoor and wet locations



Wall light with dual light emission.

WALL | IP 65 PROTECTION | CLASS I | 5W POWER

3000K CCT | 15–60° BEAM | Integrated DRIVER

GENERAL

Category	LED
Environment	Outdoor
IP rating	IP65
Installation	Wall light
Power	5+5W
Colour temperature	3000K
Source flux	490+490 lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Spot
Optics	Refractive optics
Beam angle	15°/30°/45°/60°


ELECTRICAL

Driver	On board
Power supply	220 Vac
Insulation class	I

MECHANICAL

Dimensions	See drawing
Finish	RAL Corten
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

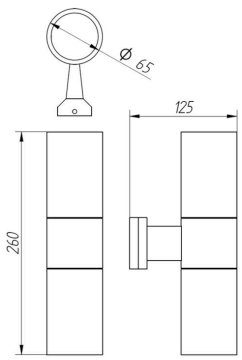

NOTES

– ON/OFF.