SPIN *Outdoor and wet locations*



Adjustable IP65 LED projector. Powder-coated anodised aluminium body.

PROJECTOR | IP 67 PROTECTION | 6W POWER | 2700–4000K CCT | 80–97 CRI

GENERAL

Category	LED
Environment	Outdoor
IP rating	IP67
Power	6W
Colour temperature	2700K, 3000K, 3500K, 4000K
Colour rendering (CRI)	80 · 90 · 95 · 97
Luminaire flux	660lm

OPTICS

Emission	Direct
LED source	LED array
Distribution	Symmetric
Optics	Spot/wide
Beam angle	26/38/60


ELECTRICAL

Power supply	24 Vdc

MECHANICAL

Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

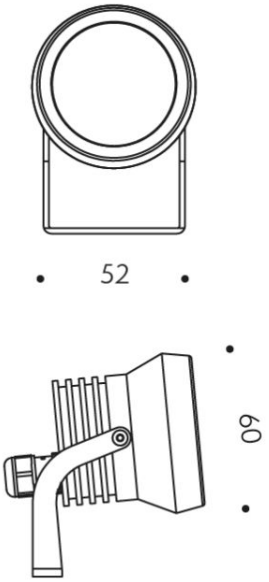

NOTES

– Dimmable with constant current driver not included.