BOOST L IP65

Outdoor and wet locations

DATASHEET BEING UPDATED



Adjustable LED luminaire for outdoor installation. Aluminium body, tempered glass screen. Paint finish according to RAL and NCS codes.

WALL	IP 65 PROTECTION	CLASS III	25W POWER
2700K CCT	>90 CRI	30° BEAM	Integrated DRIVER

CONTROL · ON REQUEST DALI

GENERAL

Category	COB LED
Environment	Outdoor
IP rating	IP65
Installation	Wall installation
Power	25W
Colour temperature	2700K
Colour rendering (CRI)	>90
Luminaire flux	3200Lm

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	Spot
Beam angle	30°


ELECTRICAL

Driver	On board
Power supply	220 VAC
Insulation class	III

MECHANICAL

Dimensions	See drawing
Finish	RAL 9005
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

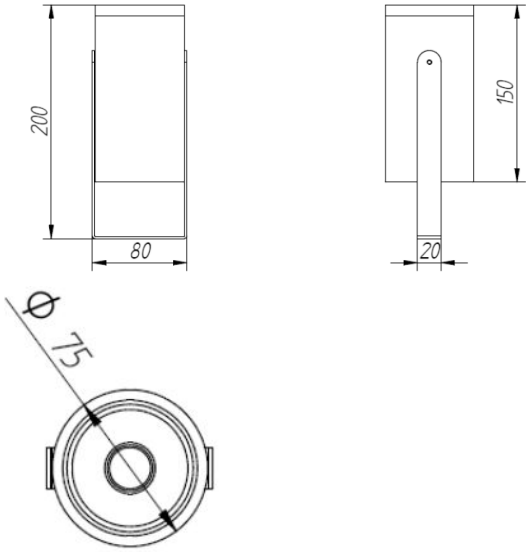

NOTES

- Mechanical and optical features fully customisable on request.
- DALI dimmable on request.