CP – CUBE L *Track projector*



Fully adjustable LED projector for installation in outdoor areas. Aluminium body. Direct light. On-board driver.

PROJECTOR	IP 65 PROTECTION	CLASS I	24W POWER
3000K CCT	80 CRI	10–60° BEAM	Integrated DRIVER

CONTROL: DALI · Casambi · DMX

GENERAL

Category	Track projector
Environment	Outdoor
IP rating	IP65
Installation	Freestanding
Power	24W
Colour temperature	3000K
Colour rendering (CRI)	80
Source flux	1680lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	PMMA lens, refractor
Beam angle	10°, 15°, 30°, 45°, 60°


ELECTRICAL

Driver	On board
Power supply	230 VAC
Insulation class	I

MECHANICAL

Dimensions	See drawing
Weight	2.200Kg
Finish	Black/grey
Material	Aluminium
Rotation	360°
Tilt	+/- 90°

TECHNICAL DRAWINGS AND DETAILS

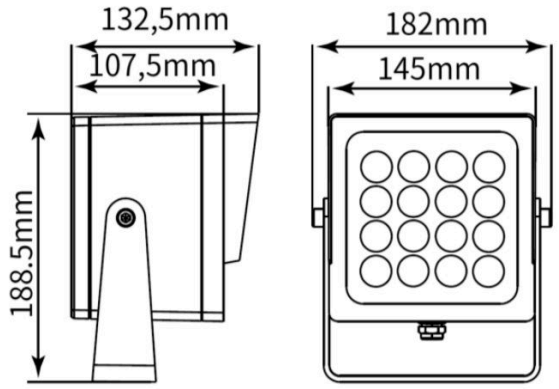

NOTES

- On/Off, DMX, DALI or Casambi with integrated driver.
- CRI97 on request.