ZED PLA SQUARE IP65 *Ceiling or wall*



Fully customisable and adjustable low-voltage LED luminaire for wall and ceiling installation. Aluminium body, PMMA lens. Direct light. Paint finish according to RAL and NCS codes.

WALL	IP 65 PROTECTION	CLASS III	6W POWER
3000K CCT	98 CRI	33° BEAM	Remote DRIVER

CONTROL · ON REQUEST DALI Casambi

GENERAL

Category	Ceiling or wall
Environment	Indoor
IP rating	IP65
Installation	Ceiling or wall installation
Power	6W
Colour temperature	3000K
Colour rendering (CRI)	98
Source flux	650 Lm

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	PMMA lens, refractor
Beam angle	33°


ELECTRICAL

Driver	Remote
Power supply	350mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	0.80Kg
Finish	Black, RAL 9010
Material	Aluminium
Rotation	360°
Tilt	+/- 90°

TECHNICAL DRAWINGS AND DETAILS

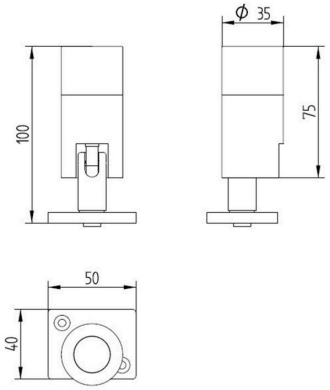

NOTES

- Remote drivers to be ordered separately.
- Mechanical and optical features fully customisable on request.
- DALI2 or Casambi dimmable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.