# THOR XS Q *Wall light, surface-mounted*




Fully customisable wall-mounted light with IP65 protection rating for outdoor installation. Direct and indirect light sources for uplight and downlight effect. Aluminium body, glass cover.

| WALL | IP 65 PROTECTION | CLASS III | 3W POWER |
|---|---|---|---|
| 3000K CCT | 90 CRI | 10° BEAM | Remote DRIVER |

CONTROL DALI

## GENERAL

| | |
|---|---|
| Category | Wall light, surface-mounted |
| Environment | Outdoor |
| IP rating | IP65 |
| Installation | Wall-mounted with bracket |
| Power | 3+3W |
| Colour temperature | 3000K |
| Colour rendering (CRI) | 90 |
| Source flux | 2×358lm |
| Luminaire flux | See photometric data |

## OPTICS

| | |
|---|---|
| Emission | Direct/indirect |
| LED source | LED Mid Power |
| Distribution | Symmetric |
| Optics | PMMA lens, refractor |
| Beam angle | 10° |


## ELECTRICAL

| | |
|---|---|
| Driver | Remote |
| Power supply | 24Vdc |
| Insulation class | III |

## MECHANICAL

| | |
|---|---|
| Dimensions | See drawing |
| Weight | 0.400 Kg |
| Finish | Any RAL or NCS code |
| Material | Aluminium |

### TECHNICAL DRAWINGS AND DETAILS

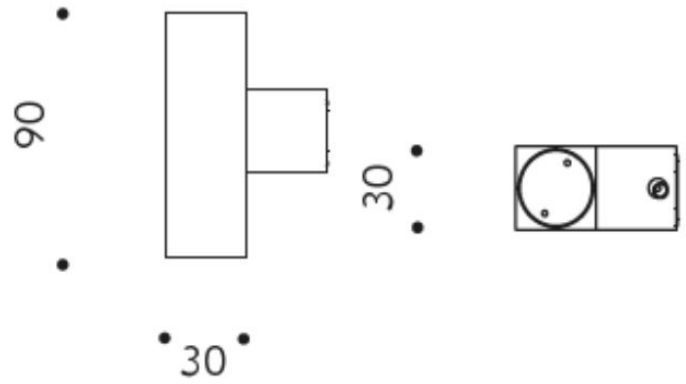


### NOTES

- Driver to be ordered separately.
- DALI dimmable, with remote driver not included.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following light beams: 10°, 20°, 35°, 60°.

### ACCESSORIES AND OPTIONS

- Custom galvanic finishes.