NIDOL SQUARE *Pole lamp*



Small IP65 pole luminaire with high efficiency and a clean design, for lawns, small trees and shrubs. Also suitable for outdoor transit areas.

BOLLARD	IP 65 PROTECTION	CLASS III	3W POWER
2700K CCT	20–90 CRI	Remote DRIVER	

GENERAL

Category	Pole lamp
Environment	Outdoor
IP rating	IP65
Installation	Pole
Power	3W
Colour temperature	2700K
Colour rendering (CRI)	90 · Source flux (lm) @ 25°C 200 lm

OPTICS

Emission	Direct
LED source	LED array
Distribution	Symmetric
Optics	Wide
Beam angle	Lambertian


ELECTRICAL

Driver	Remote · 24 Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	Approx. 300 g
Finish	RAL Corten
Material	Metal

TECHNICAL DRAWINGS AND DETAILS

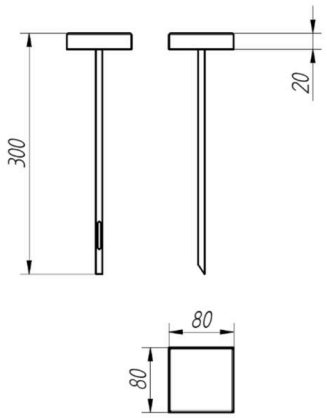

NOTES

- Fixing system to be defined.
- DRAFT: all features are to be confirmed.