
NET *Chandelier*

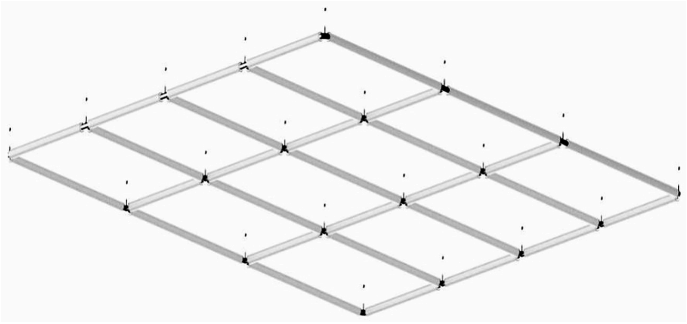

Decorative pendant chandelier made of ribbed glass tubes and mirror-polished metal joints. The modular, customisable glass elements allow the chandelier composition to be adapted to the spaces to be lit and to the ceiling surfaces to be covered. Linear LED sources with 360° emission. Adjustable spotlights can be mounted on the metal joints.

PENDANT	IP 20 PROTECTION	CLASS III	14,4W/m POWER

2700K CCT	>90 CRI

GENERAL

Category	Chandelier
Environment	Indoor
IP rating	IP20
Installation	Suspension
Power	14.4 W/m al 100%
Colour temperature	2700K
Colour rendering (CRI)	>90
Source flux	950 lm/m al 100%
Luminous efficacy	66 lm/W

OPTICS

Emission	Direct
LED source	Neonflex
Distribution	Symmetric
Optics	Opal diffuse


ELECTRICAL

Driver	4 × 240W
Power supply	24 Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	Approx. 160 kg
Finish	Mirror finish
Material	Glass / metal

TECHNICAL DRAWINGS AND DETAILS

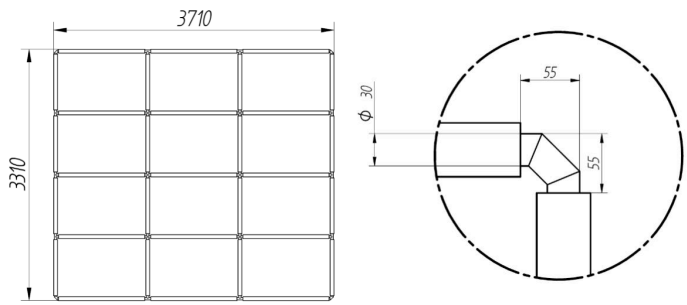

NOTES

- Dimmable with remote constant current driver.
- All technical features are fully customisable.