ZUMY L TRACK B *Zoom projector*



Zoom projector suitable for art galleries, stage lighting and lighting effects. Adapter for installation on Eurostandard track. Body painted according to RAL codes. High CRI and R9 values, for naturally saturated red colour rendering. Available in a DALI version.

TRACK	IP 20 PROTECTION	CLASS II	20W POWER
3000K CCT	90 CRI	12–55° BEAM	Integrated DRIVER

CONTROL DALI

GENERAL

Category	Zoom projector
Environment	Indoor
IP rating	IP20
Installation	EuroTrack
Power	20W
Colour temperature	3000K
Colour rendering (CRI)	90
Source flux	2000 Lm

OPTICS

Emission	Direct
LED source	COB
Distribution	Spot/wide
Optics	Zoom
Beam angle	12° / 55°


ELECTRICAL

Driver	On board
Power supply	220Vac
Insulation class	II

MECHANICAL

Dimensions	See drawing
Weight	750gr
Finish	White
Material	Aluminium
Rotation	0°/90°
Tilt	359°

TECHNICAL DRAWINGS AND DETAILS

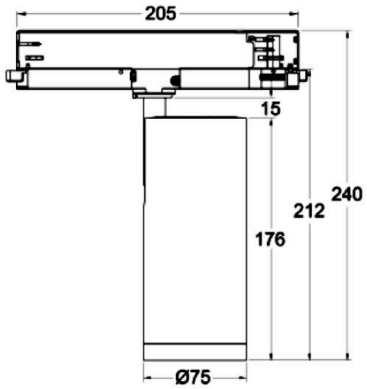

NOTES

- DALI dimmable.
- Available in colour temperatures 2700K, 3000K, 4000K.
- Body colour available made-to-measure in any RAL or NCS paint finish.
- Framing head available in black and white finish only.