ROTORLED (T5) *Showcases and jewellery displays*

Aluminium LED structure with dimming system.



SHOWCASE | IP 40 PROTECTION | 1,2W POWER | 3000–6000K CCT | >90 CRI | 30° BEAM

GENERAL

Category	LED
Environment	Indoor
IP rating	IP40
Installation	Recessed
Power	12x1.2W
Colour temperature	3000K, 4000K, 6000K
Colour rendering (CRI)	>90
Luminaire flux	12×450

OPTICS

Emission	Direct
LED source	LED array
Distribution	Symmetric
Optics	Spot
Beam angle	12×30°


ELECTRICAL

Power supply	24 Vdc

MECHANICAL

Dimensions	Ø150×26mm
Recess cut-out	Ø133
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

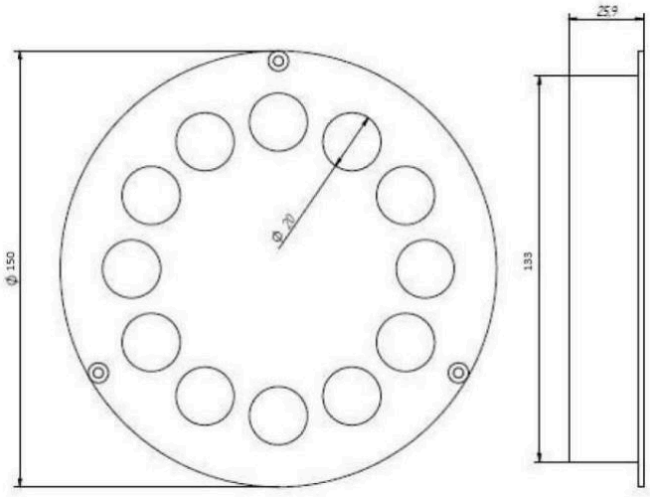

NOTES

- Dimmable with constant current driver not included.