MONOLITH MSP MILL *Track*

Tiltable LED projector for installation on low-voltage track. Aluminium body.



TRACK	IP 40 PROTECTION	CLASS III	11W POWER
2700K CCT	>90 CRI	18° BEAM	Remote DRIVER

CONTROL · ON REQUEST DALI Casambi

GENERAL

Category	COB LED
Environment	Indoor
IP rating	IP40
Installation	Track installation
Power	11W
Colour temperature	2700K
Colour rendering (CRI)	>90
Source flux	1270Lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Acrylic refractive optics
Beam angle	18°


ELECTRICAL

Driver	Remote
Power supply	48Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Finish	RAL 9010
Material	Aluminium
Rotation	+/- 180°
Tilt	90°

TECHNICAL DRAWINGS AND DETAILS

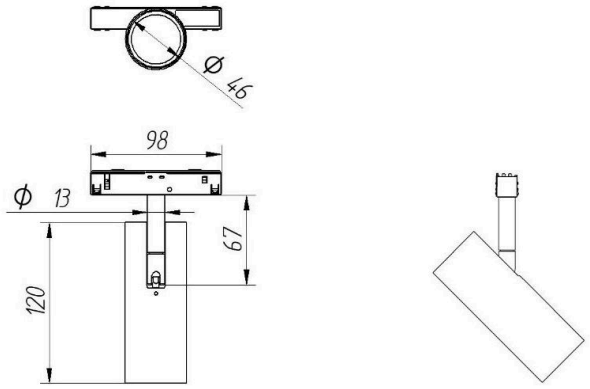

NOTES

– DALI or Casambi dimmable on request.