FEMO ADJ - B *Surface and wall projector*



Fully adjustable LED projector for installation in gardens and on façades. Aluminium body, tempered glass. Direct light.

WALL	IP 65 PROTECTION	CLASS III	1,5W POWER
2700K CCT	90 CRI	24° BEAM	Remote DRIVER

CONTROL: DALI, Triac, 1-10V

GENERAL

Category	Surface and wall-mounted projector
Environment	Outdoor
IP rating	IP65
Installation	Ground and wall installation
Power	1.5W
Colour temperature	2700K
Colour rendering (CRI)	90
Source flux	105lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Glass lens, refractor
Beam angle	24°


ELECTRICAL

Driver	Remote
Power supply	24 Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Finish	Any RAL, NCS code
Material	Aluminium, tempered glass
Rotation	360°
Tilt	+/- 180°

TECHNICAL DRAWINGS AND DETAILS

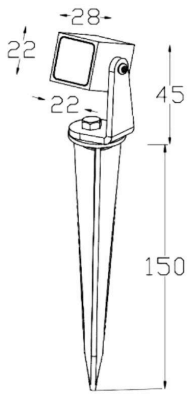

NOTES

- On/Off, 0/1-10V, Triac, DALI without integrated driver.
- Driver to be ordered separately.
- Available in the following colour temperatures: 2700K, 3000K, 4000K, 6000K.
- Available with the following beam angles: 15°, 24°, 45°, 60°.
- Supplied with power cable L: 2 m.

ACCESSORIES AND OPTIONS

- Plastic ground spike for ground installation