EARTH S 220VAC *Ground projector*



Fixed luminaire with IP65 protection rating and plastic recessed housing for integration into concrete floors. Uplight beam with recessed light source and double anti-glare. Suitable for ground installation in outdoor areas. Aluminium body, tempered glass and steel flange. Direct light. On-board driver.

GROUND	IP 67 PROTECTION	CLASS III	6W POWER
3000K CCT	90 CRI	10° BEAM	Integrated DRIVER

CONTROL DALI Triac

GENERAL

Category	Ground projector
Environment	Indoor and outdoor
IP rating	IP67
Installation	Ground installation
Power	6W
Colour temperature	3000K
Colour rendering (CRI)	90
Source flux	560lm

OPTICS

Emission	Direct
LED source	LED Mid Power
Distribution	Symmetric
Optics	PMMA lens, refractor
Beam angle	10°


ELECTRICAL

Driver	On board
Power supply	230 VAC
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	See drawing
Weight	1.4 Kg
Finish	Black and stainless steel
Material	Aluminium, PMMA, stainless steel, glass

TECHNICAL DRAWINGS AND DETAILS

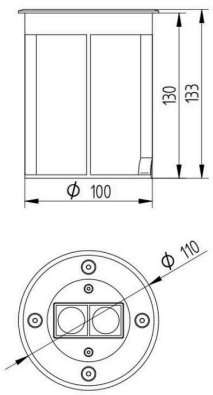

NOTES

- On/Off, Triac, with integrated driver.
- DALI, with remote driver.