NOVASPOT APPLIQUE IP65 (B) *LED wall light*



Outdoor LED downlight with IP65 protection rating, for external wall or pole installation. Aluminium and plastic body, PMMA lens. Paint finishes according to RAL or NCS codes. On-board driver. DALI dimmable.

BOLLARD	IP 65 PROTECTION	CLASS I	10W POWER
4000K CCT	98 CRI	24° BEAM	Integrated DRIVER

CONTROL DALI

GENERAL

Category	LED wall light
Environment	Indoor or outdoor
IP rating	IP65
Installation	On pole or wall
Power	10W
Colour temperature	4000K
Colour rendering (CRI)	98
Source flux	1200lm

OPTICS

Emission	Direct
LED source	COB
Distribution	Symmetric
Optics	Acrylic refractive optics
Beam angle	24°


ELECTRICAL

Driver	Integrated
Power supply	220Vac
Insulation class	I

MECHANICAL

Dimensions	See drawing
Weight	950g
Finish	Any RAL or NCS code
Material	Aluminium/glass/PLA

TECHNICAL DRAWINGS AND DETAILS

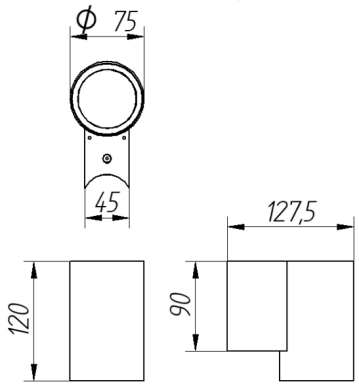

NOTES

- DALI dimmable.
- Available in colour temperatures 2700K, 3000K, 4500K, 4000K, 5000K.
- Available with 15°, 24°, 38°, 60° beam angles.