KALLISTO IP65 10W

Outdoor and wet locations



IP65 front recessed LED spotlight for general lighting. Aluminium body, tempered glass screen.

RECESSED · IP 65 PROTECTION · CLASS III · 10W POWER

2700K CCT · >90 CRI · Remote DRIVER

CONTROL · ON REQUEST — DALI

GENERAL

Category	COB LED
Environment	Outdoor
IP rating	IP65
Installation	Ceiling or wall
Power	10W
Colour temperature	2700K
Colour rendering (CRI)	>90
Source flux	1411 Lm
Luminaire flux	1070 Lm

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	Spot
Beam angle	Medium


ELECTRICAL

Driver	Remote
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø 75mm
Weight	280gr
Finish	White finish – RAL codes
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

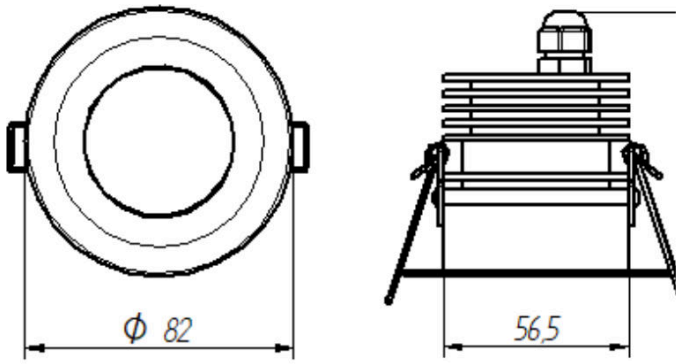

NOTES

- DALI dimmable on request.
- Available in other colour temperatures.
- Available with custom sizes or paint finishes.
- All technical features are customisable on request.

ACCESSORIES AND OPTIONS

- Available with custom honeycomb anti-glare accessory.