NOVA NOVA M FL IP54 *Recessed downlight*



Adjustable trimless LED luminaire, recessed in false ceilings with metal recessed housing. Aluminium body, PMMA lens, direct light. Suitable for installations in damp environments, with IP54 protection rating. Very high R9 index for naturally saturated red rendering.

RECESSED	IP 54 PROTECTION	CLASS III	10W POWER
3000K CCT	98 CRI	15° BEAM	Remote DRIVER

GENERAL

Category	Recessed downlight
Environment	Indoor / outdoor, IP54 compliant
IP rating	IP54
Installation	Recessed in false ceiling
Power	10W
Colour temperature	3000K
Colour rendering (CRI)	98
R9	97
Source flux	1055lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	PMMA lens, refractor
Beam angle	15°


ELECTRICAL

Driver	Remote
Power supply	600 mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Diam. 95mm
Weight	250gr
Finish	Anodised
Material	Aluminium
Rotation	360°
Tilt	+/-25°

TECHNICAL DRAWINGS AND DETAILS

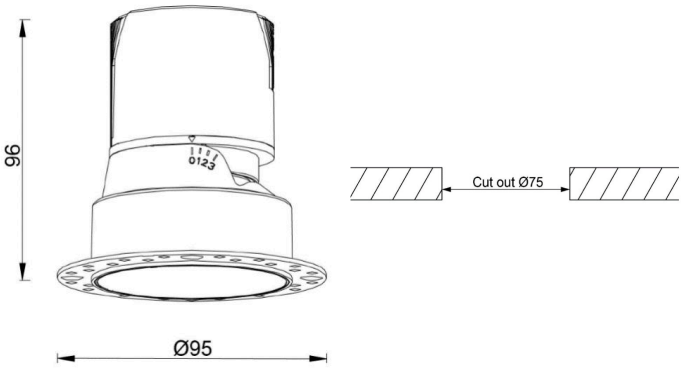

NOTES

- Dimmable with external remote constant current driver.
- Driver to be ordered separately.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following beam angles: 15°, 35°, 60°.