APPLIQUE NOVASLIM 2X IP65 *Wall light*



Fully customisable luminaire with dual IP65 spotlight: two powerful adjustable spotlights placed inside the structure. Suitable for outdoor wall installations. Customisable paint finishes. Very high R9 value for naturally saturated red colour rendering.

WALL	IP 65 PROTECTION	CLASS III	6W + 6W POWER
3000K CCT	98 CRI	25° BEAM	Remote DRIVER

GENERAL

Category	Wall light
Environment	Outdoor
IP rating	IP65
Installation	Wall/ceiling
Power	6W + 6W
Colour temperature	3000K
Colour rendering (CRI)	98
R9	97
Source flux	1454Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Spot
Optics	Refractive optics
Beam angle	25°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	0.9Kg
Finish	Corten Lucenova + Tiffany
Material	Aluminium
Rotation	+/- 180°
Tilt	90°

TECHNICAL DRAWINGS AND DETAILS

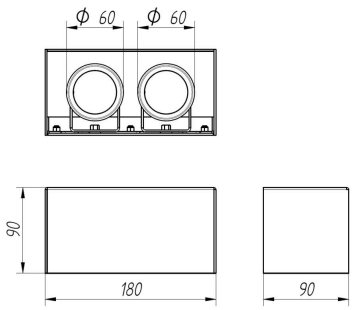

NOTES

- All features can be customised according to the customer's wishes or needs.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following light beams: 15°, 25°, 40°, 60°.
- DRAFT: mechanical, optical and aesthetic features must be confirmed through prototype analysis.