ARGE *Track framing projector*



Fully adjustable LED track luminaire for concentrated, sharp and precise light emission even over long distances. Suitable for art galleries. Designed for projecting custom logos. Aluminium body. Driver included. Very high R9 value for naturally saturated red colour rendering.

TRACK	IP 40 PROTECTION	CLASS I	25W POWER
3000K CCT	97 CRI	Integrated DRIVER	

GENERAL

Category	Track framing projector
Environment	Indoor
IP rating	IP40
Installation	Electrified Euro track
Power	25W
Colour temperature	3000K
Colour rendering (CRI)	97
R9	97
Source flux	2538Lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Refractive PMMA
Beam angle	Variable


ELECTRICAL

Driver	Integrated
Power supply	220 Vac
Insulation class	I

MECHANICAL

Dimensions	See drawing
Weight	2 kg
Finish	Any RAL and NCS code
Material	Aluminium
Rotation	+/- 359°
Tilt	140°

TECHNICAL DRAWINGS AND DETAILS

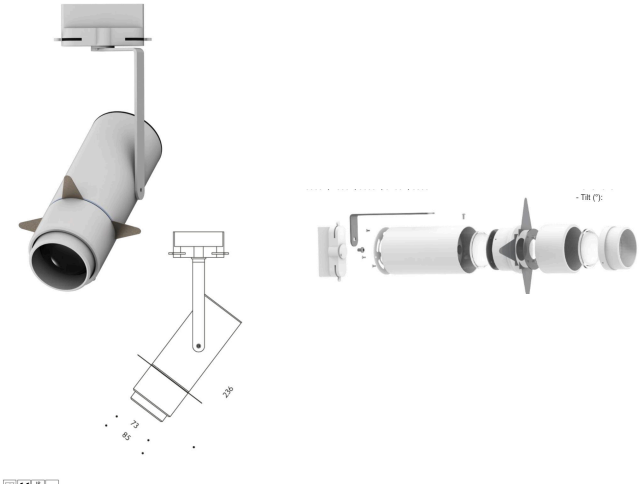

NOTES

- Available in surface-mounted and recessed versions.
- Also available in Class III, with remote dimmable driver.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.